



2003-2006 Chevrolet Silverado Headlight Bulb Replacement

How to change the low beam lights on a 2003-2006 Chevy Silverado.

Written By: Alisson Silva



INTRODUCTION

This is a guide on how to replace the low beam lights on a 2004 Chevrolet Silverado. The headlight is held in place by clips. You will not need any tools to complete this project besides the replacement bulbs.




PARTS:

- [Sylvania SilverStar 9006 ST ZXE Halogen Headlight Bulb, 2 Pack](#) (1)
-

Step 1 — Preparation



 Turn your vehicle off and let the engine bay cool off before starting the following steps.


- Open up the driver side door, reach under the steering wheel, and release the latch to open up the hood of your truck.
- Next, walk over to either of the headlights and remove the pin on top to release the housing unit.
- ☒ Make sure to put the pin in a safe location so you can insert it back into the housing when you are finished replacing the light bulbs.

Step 2 — Removing the old lights




- After removing the pin, you should now be able to tilt the headlight downward to gain access to all of the wires.
- Pinch the blue clips and remove them from the back of the wiring harness.
- Twist the light bulb and housing counter-clockwise. After twisting the housing, gently remove it from the headlight.

Step 3 — Inserting the new lightbulb

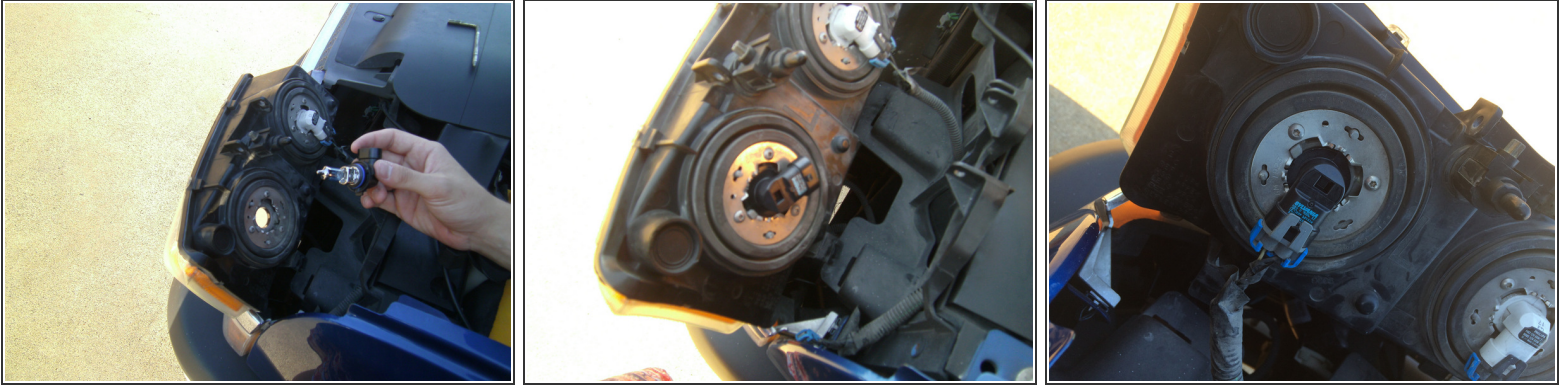

- Unbox your new lowbeam and insert it into the same hole you took the old one out of.
- ⓘ Be sure to twist the bulb clockwise until the long part is down so that it locks in place.
- Place the blue clips from the old bulb onto the new bulb.

Step 4 — Putting the headlight in

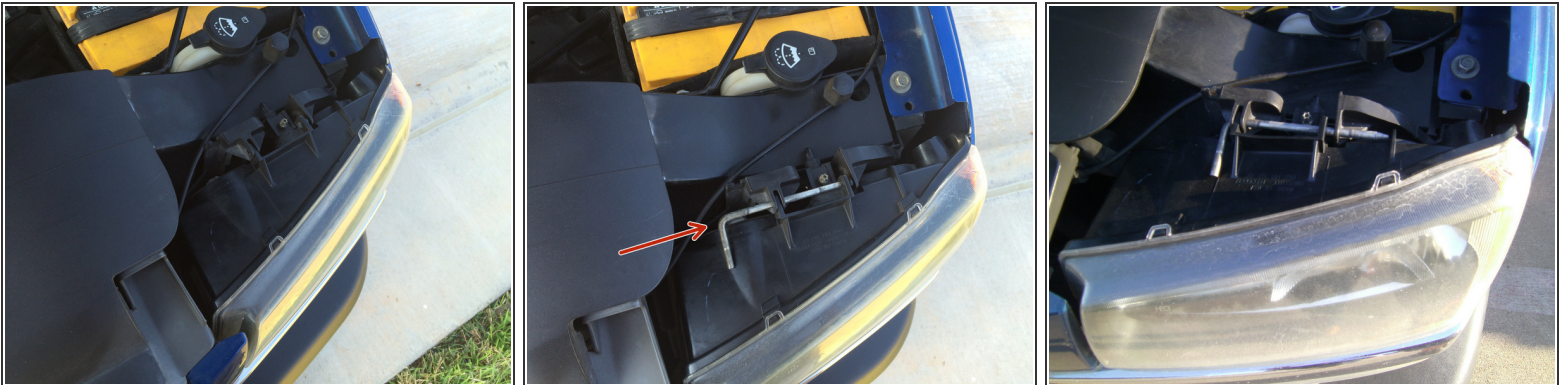


- Begin to replace the headlight casing back into its original place in the truck by tucking in the wires.
- Align the casing back where you took it from.
- Grab the pin that you took out at the beginning and insert it back into the housing unit.

Step 5 — Repeat



- Follow steps 1-4 on the other headlight to replace that lowbeam.

 Make sure to keep track of all of your parts and dispose of your old bulbs properly.

To replace the other light bulb just follow the same steps as above.

This document was last generated on 2017-11-04 07:09:34 AM.